

इंटरनेट

मानक

Disclosure to Promote the Right To Information

Whereas the Parliament of India has set out to provide a practical regime of right to information for citizens to secure access to information under the control of public authorities, in order to promote transparency and accountability in the working of every public authority, and whereas the attached publication of the Bureau of Indian Standards is of particular interest to the public, particularly disadvantaged communities and those engaged in the pursuit of education and knowledge, the attached public safety standard is made available to promote the timely dissemination of this information in an accurate manner to the public.

“जानने का अधिकार, जीने का अधिकार”

Mazdoor Kisan Shakti Sangathan

“The Right to Information, The Right to Live”

“पुराने को छोड़ नये के तरफ”

Jawaharlal Nehru

“Step Out From the Old to the New”

IS 11252 (1993): Earth-moving machinery - Zones of comfort and reach for controls [MED 7: Material Handling Systems and Equipment]



“ज्ञान से एक नये भारत का निर्माण”

Satyanarayan Gangaram Pitroda

“Invent a New India Using Knowledge”



“ज्ञान एक ऐसा खजाना है जो कभी चुराया नहीं जा सकता है”

Bhartrhari—Nitiśatakam

“Knowledge is such a treasure which cannot be stolen”

BLANK PAGE



भारतीय मानक

मिट्टी उठाने की मशीनरी — सुविधा के अंचल और
नियंत्रणों पर पहुँच

(पहला पुनरीक्षण)

Indian Standard

EARTH-MOVING MACHINERY — ZONES OF
COMFORT AND REACH FOR CONTROLS

(First Revision)

UDC 621.878.879 : 331.101.1

© BIS 1993

BUREAU OF INDIAN STANDARDS
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG
NEW DELHI 110002

NATIONAL FOREWORD

This Indian Standard, which is identical with ISO 6682 : 1986 'Earth-moving, machinery — Zones of comfort and reach for controls' issued by the International Organization for Standardization (ISO) was adopted by the Bureau of Indian Standards on the recommendations of the Bulk Handling Systems and Equipment Sectional Committee (HMD 7) and approval of the Heavy Mechanical Engineering Division Council.

This standard was first published in 1987. ISO 6682 : 1986 has been adopted during this revision.

The text of ISO standard has been approved for publication as Indian Standard without deviations. Certain terminology and conventions are however not identical to those used in Indian Standards. Accordingly, wherever the words 'International Standard' appear referring to this standard, they should be read as 'Indian Standard'.

In this adopted Indian Standard, reference appears to certain International Standards for which Indian Standards also exist. The corresponding Indian Standards which are to be substituted in their place are listed below along with their degree of equivalence for the editions indicated:

<i>International Standard</i>	<i>Corresponding Indian Standard</i>	<i>Degree of Equivalence</i>
ISO 3411	IS 11115 : 1985 Human physical dimensions of operators and minimum operator space envelope for earth moving machinery	Technically equivalent
ISO 5353	IS 11113 : 1985 Determination of seat index point of earth moving equipment	Technically equivalent
ISO 6746/1	IS 11114 (Part 2) : 1993 Earth-moving machinery — Definitions of dimensions and symbols : Part 2 Base machine (<i>first revision</i>)	Identical

In reporting the results of a test or analysis made in accordance with this standard, if the final value, observed or calculated is to be rounded off, it shall be done in accordance with IS 2 : 1960 'Rules for rounding off numerical values (*revised*)'.

ADDITIONAL INFORMATION

IS 11113 : 1985 and IS 11115 : 1985 are under revision. They will be published under dual number system by adopting the corresponding International Standards. After publication of these standards, the above mentioned standards will be identical to International Standards.

Indian Standard

EARTH-MOVING MACHINERY — ZONES OF COMFORT AND REACH FOR CONTROLS

(First Revision)

1 Scope

This International Standard defines zones of comfort and reach for controls derived from the overlapping reach capability of large and small operators in the seated position.

2 Field of application

This document is intended as a guide for the design of the operator compartment controls for earth-moving machinery.

3 References

ISO 3411, *Earth-moving machinery — Human physical dimensions of operators and minimum operator space envelope*.

ISO 5353, *Earth-moving machinery — Seat index point (SIP)*.

ISO 6746/1, *Earth-moving machinery — Definitions of dimensions and symbols — Part 1: Base machine*.

4 Definitions

4.1 SIP: Seat Index Point as defined by ISO 5353 (fixed at nominal seat adjustments).

4.2 control displacement: Travel or movement of a control through its operational range.

4.3 control location: Positions of a control, including the corresponding control displacement, defined from the SIP.

4.4 primary controls: Controls that are used frequently or continuously by the operator, such as:

- a) Machine controls: transmission, brakes, steering, engine speed, etc.
- b) Working tool controls: blade controls, bucket controls, ripper controls, etc.

4.5 secondary controls: Controls that are infrequently used by the operator, such as lights, windscreen wipers, starter, heater, air conditioner, etc.

4.6 zones of comfort: Preferred control location zones for primary hand and foot controls. Both large and small operators should be able to reach controls comfortably in these zones.

4.7 zones of reach: Control location zones for secondary hand and foot controls. Both large and small operators should be able to reach controls in these zones from the seated position, but the operator may be required to rotate or lean forward and to each side.

4.8 XYZ coordinate system: Coordinate system used to define the control zone locations:

- a) Origin at the SIP.
- b) X-axis; fore-aft, positive to front of the SIP.
- c) Y-axis; lateral, positive to right of the SIP.
- d) Z-axis; vertical, positive upward from the SIP.

See ISO 6746/1.

4.9 flexion: Movement that changes the angle between body parts.

4.10 adduction: Movement in a plane normal to the plane of flexion and directed towards or past the mid-axis (XZ plane) of the body.

4.11 abduction: Movement in a plane normal to the plane of flexion and directed away from the mid-axis (XZ plane) of the body.

4.12 circumduction: Movement about an axis that circumscribes a cone.

5 Control location zones

5.1 The control location zones are determined in relation to the SIP.

5.2 The zones of comfort and zones of reach for hand and foot controls are shown in figures 1, 2 and 3. These zones correspond to the human physical dimensions given in ISO 3411.

5.3 Control location zones are defined by the common reach zones for large and small operators. The specific conditions which are used to derive these control location zones are presented in annex A.

5.4 The zone of comfort for hand controls may be rotated up to 30° about a vertical axis through the SIP for reaching rear equipment controls that are used whilst the operator is turned in the seat.

5.5 The zones of comfort and reach for hand controls may be increased by 75 mm for controls operated by finger grasp.

5.6 Annex B lists the X, Y and Z coordinates and radii of figures 1, 2 and 3 which should be used when developing larger scale drawings as drafting aids.

Annex A

Specific conditions used to derive control location zones

(Refer to figures 1, 2 and 3)

A.1 Control location zones

A.1.1 The seat back cushion has a 10° nominal rake angle and a width of 500 mm. The control location zones may be affected if the nominal seat back cushion rake angle exceeds $\pm 5^\circ$ variation from 10° or if the seat back cushion width exceeds 550 mm.

A.1.2 Both large and small operators position the seat at the nominal vertical adjustment. Vertical seat adjustment (75 mm recommended) is used by individual operators to account for anthropometric variations : long legs but short arms, long trunk but short legs, etc.

A.1.3 The seat has a 150 mm fore-aft adjustment. The small operator adjusts the seat to the most forward position and the large operator adjusts the seat to the most rearward position.

A.1.4 Control location zones for machines that have between 100 mm and 150 mm fore-aft seat adjustment can be derived as follows :

- use hand control location zones defined in figures 1, 2 and 3;
- modify foot control location zones defined in figures 1, 2 and 3 by narrowing the foot control location zones by 25 mm in both the fore and aft directions.

Table 1 — Summary — Body pivot dimensions (see figure 1)

Dimensions in millimetres

Abbreviation	Body coordinates	Large operator	Small operator
SH	Shoulder — hip	480	396
HK	Hip — knee	452	372
KA	Knee — ankle	445	367
AA'	Ankle — shoe sole	119	98
AP	Ankle — pedal (when $A_4 = 90^\circ$)	150	124
SE	Shoulder — elbow	300	247
EW	Elbow — wrist	267	220
EHg	Elbow — hand grasp	394	325
AT	Ankle — toe (when $A_4 = 90^\circ$)	243	200
—	Hip — hip (lateral)	185	152
—	Shoulder — shoulder (lateral)	376	310

Table 2 — Summary — Range of movement angles (see figure 1)

Angles in degrees

Ref.	Angle (right side joint)	Movement	Angle	
			Comfort	Maximum
A ₁	Seat back angle	Flexion	10	5 to 15
	Trunk	Abduction	0	— 20
A ₂	Hip	Flexion	75 to 100	60 to 110
		Adduction	10	10
		Abduction	— 22	— 30
		Flexion	75 to 160	75 to 170
A ₃	Knee	Flexion	85 to 108	78 to 115
A ₄	Ankle	Flexion	— 35 to 85	— 50 to 180
A ₅	Shoulder	Adduction	20	20
		Abduction	— 70	— 120
		Clavicle circumduction	20	20
		Flexion	60 to 180	45 to 180

Annex B

Summary of coordinates for defining control location zones

(Refer to 5.6)

Coordinates to define the zone of comfort and zone of reach for control location are summarized in tables 3, 4, 5 and 6. Since the control location zones are symmetrical about the XZ plane, only one half is defined. The other half can be defined by changing the sign of the Y coordinates. (See 4.8.)

The control location zones are defined by coordinates for the corners of planar surfaces, and by the centre of curvature coordinates and the radii of spherical and cylindrical surfaces. The zone of reach for hand controls is defined by planar and cylindrical boundaries that are tangential to the spherical surfaces defined in table 4.

Table 3 — Coordinates for zone of comfort — Hand control location zone

Centre of curvature ¹⁾	Coordinates (X, Y, Z)	Radius
S _L	(-159, 188, 476)	R ₁ = 734 R ₂ = 691
Point ¹⁾	Coordinates (X, Y, Z)	
A ₁	(132, 500, 425)	
A ₂	(132, 500, -100)	
B ₁	(132, 400, 425)	
B ₂	(132, 400, -100)	
C ₁	(230, 250, 425)	
C ₂	(230, 250, -100)	
D ₁	(296, 250, 425)	
D ₂	(296, 250, -100)	
E ₁	(530, 500, 425)	
E ₂	(221, 500, -100)	
F ₁	(573, 400, 425)	
F ₂	(296, 400, -100)	

1) Refer to figures 4, 5 and 6.

Table 4 — Coordinates for zone of reach — Hand control location zone

Centre of curvature ¹⁾	Coordinates (X, Y, Z)	Radius
S _{S1}	(6, 283, 368)	R ₃ = 625
S _{S2}	(245, 283, 368)	R ₃ = 625
S _M	(-160, 0, 400)	R ₄ = 450
Point ¹⁾	Coordinates (X, Y, Z)	
G	X = -400	

1) Refer to figures 4, 5 and 6.

Table 5 — Coordinates for zone of comfort — Foot control location zone


Centre of curvature ¹⁾	Coordinates (X, Y, Z)	Radius
K _{S1}	(446, -75, -32)	R ₅ = 500
Point ¹⁾	Coordinates (X, Y, Z)	
H	(581, -275, -470)	
I	(820, -275, -150)	
J	(932, -275, -150)	
K	(687, -275, -470)	

1) Refer to figures 4, 5 and 6.

Table 6 — Coordinates for zone of reach — Foot control location zone

Centre of curvature ¹⁾	Coordinates (X, Y, Z)	Radius
K _{S2}	(441, -75, -65)	R ₆ = 500
Point ¹⁾	Coordinates (X, Y, Z)	
L	(581, -375, -470)	
M	(796, -375, -75)	
N	(941, -375, -75)	
O	(734, -375, -470)	

1) Refer to figures 4, 5 and 6.



5

Dimensions in millimetres

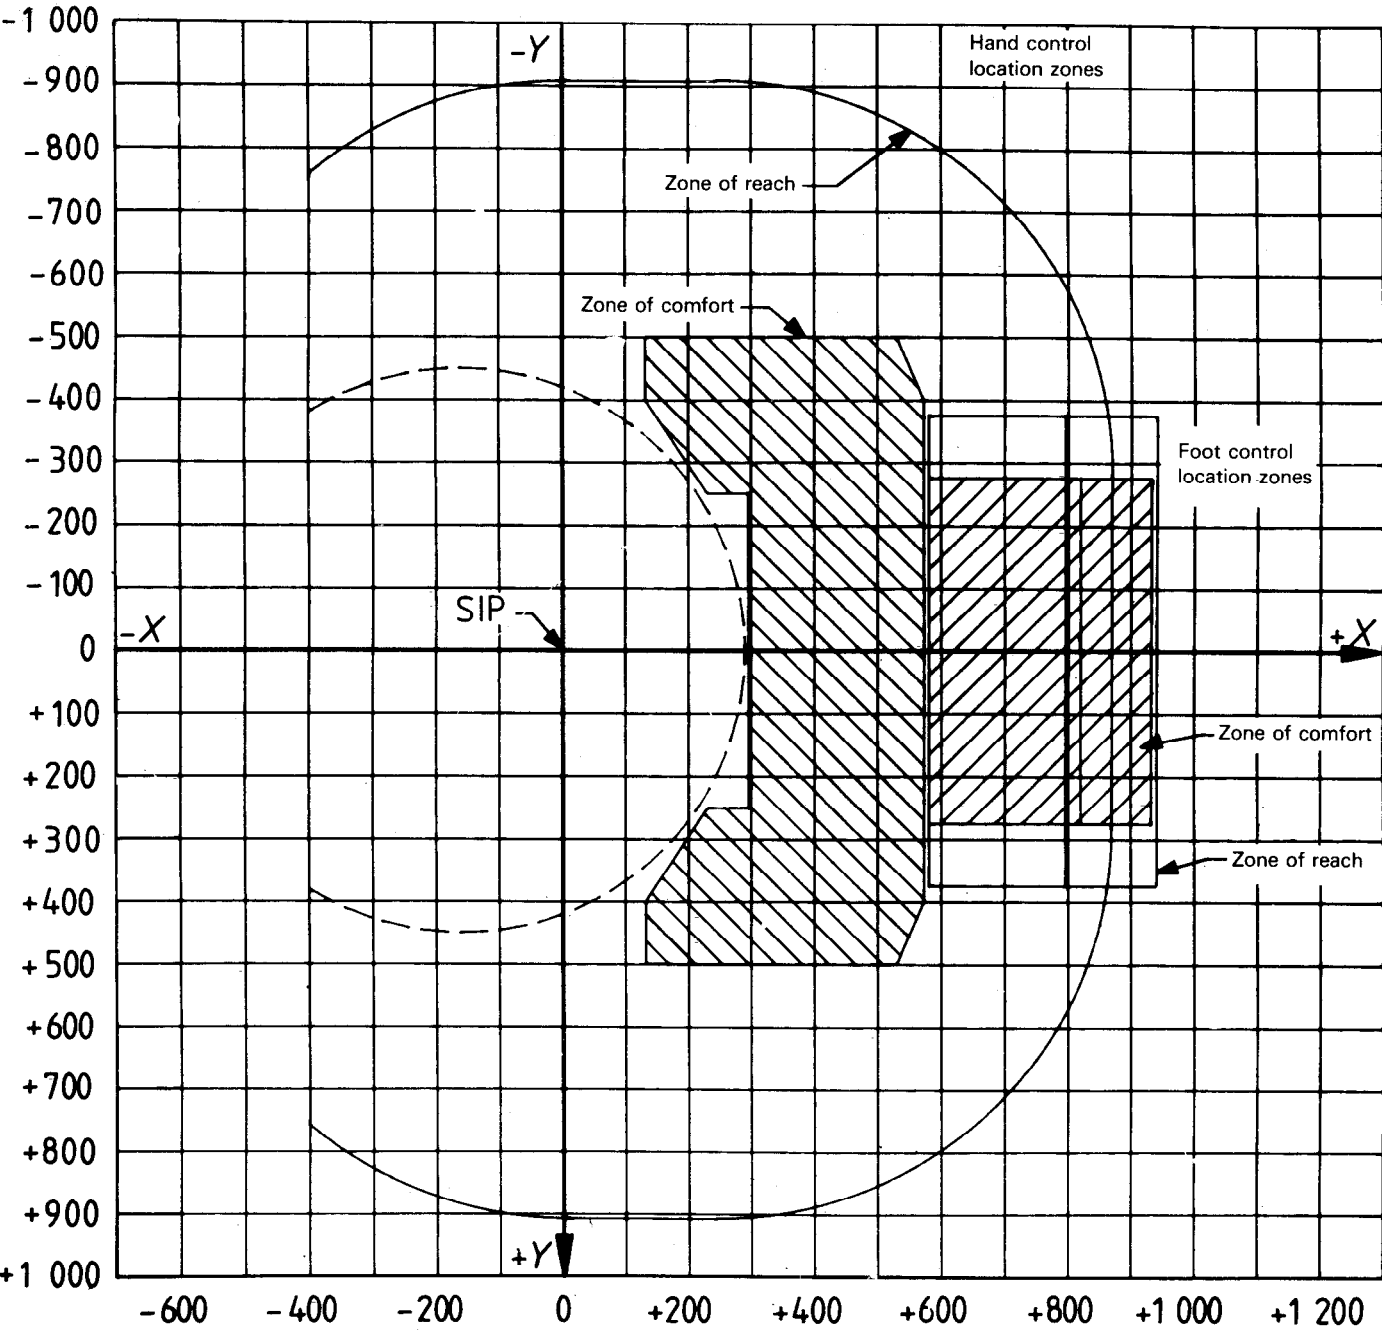


Figure 2 — Zones of comfort and reach — Top view

Dimensions in millimetres

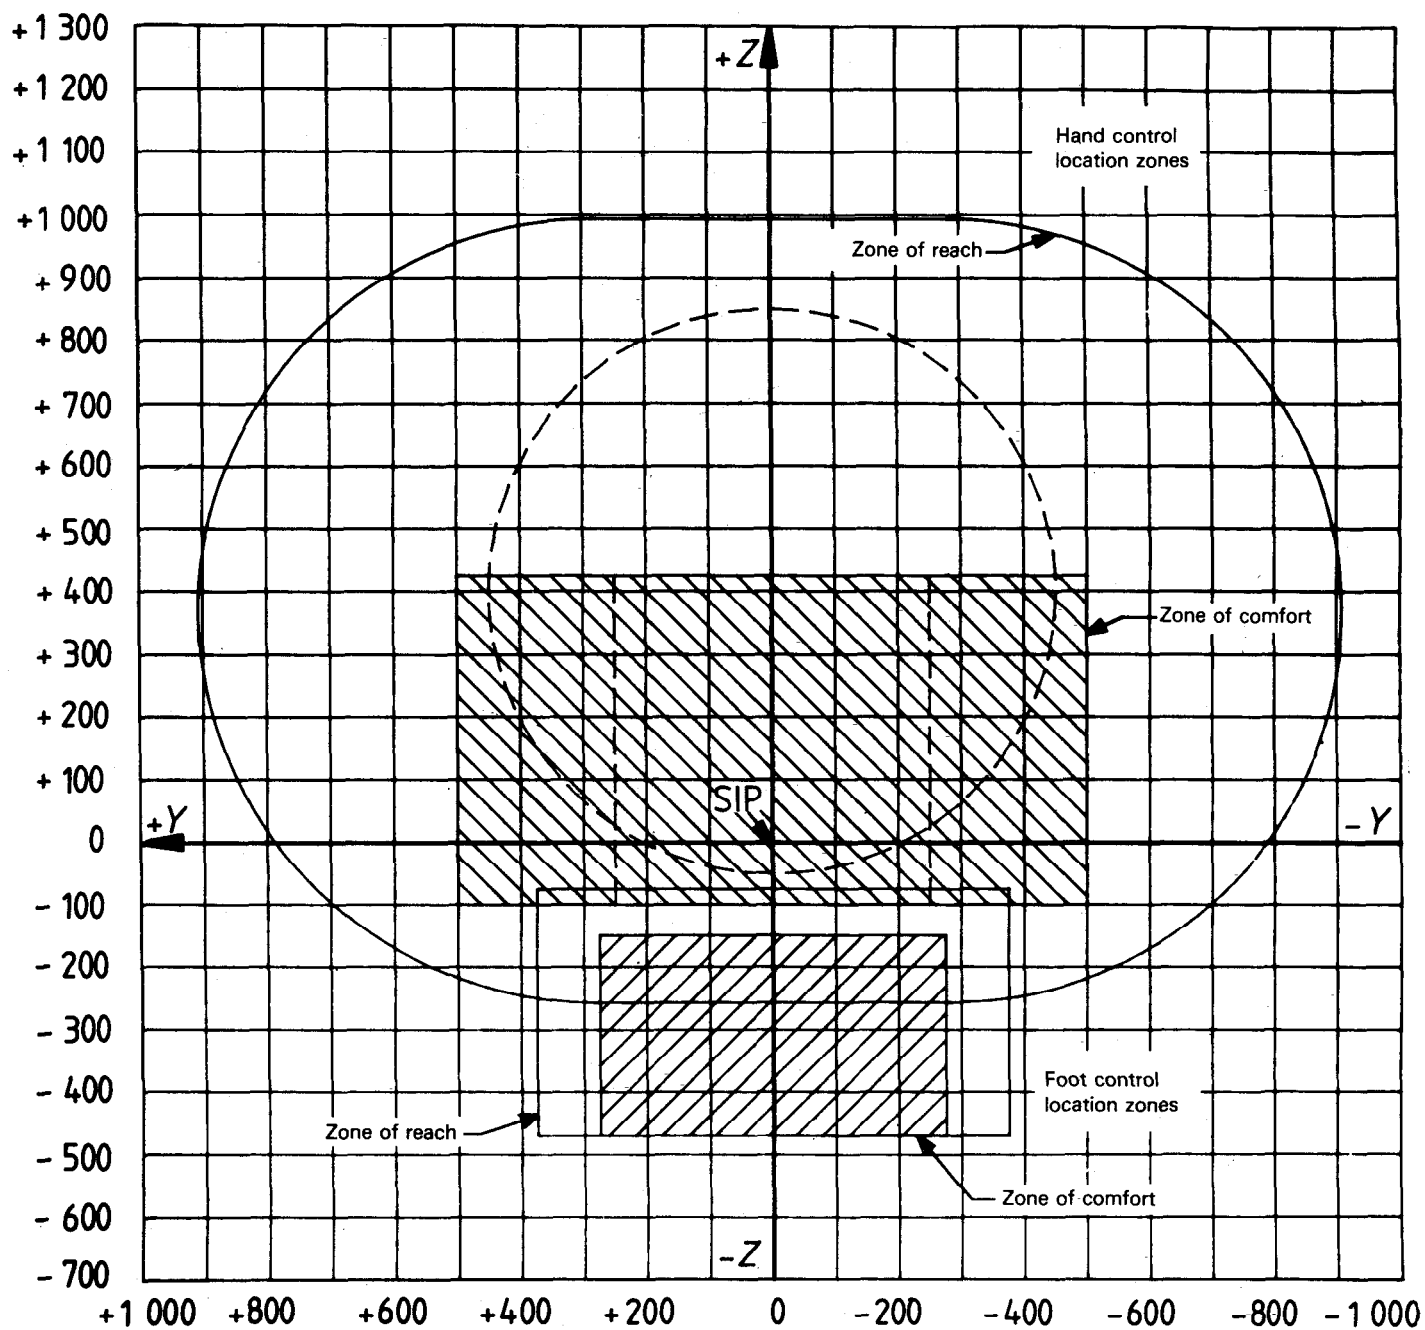


Figure 3 — Zones of comfort and reach — Front view

Dimensions in millimetres


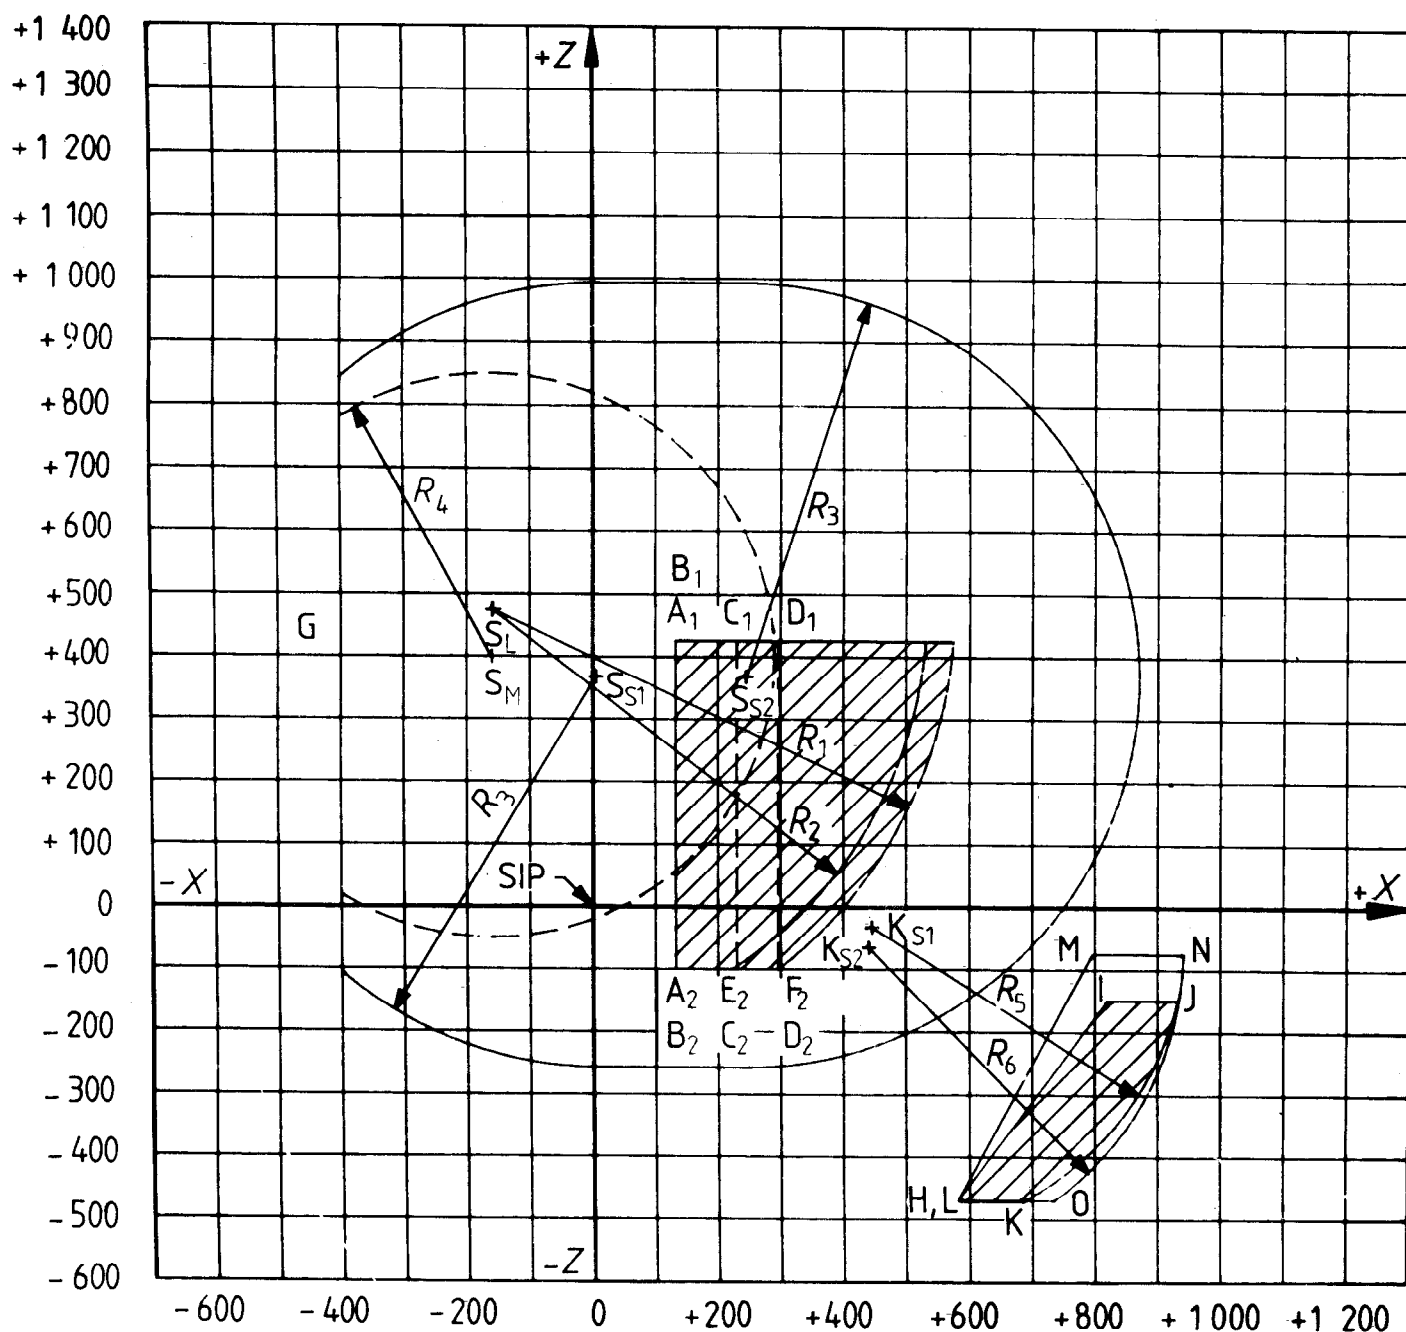


Figure 4 — Coordinates for zones of comfort and reach — Side view



Dimensions in millimetres

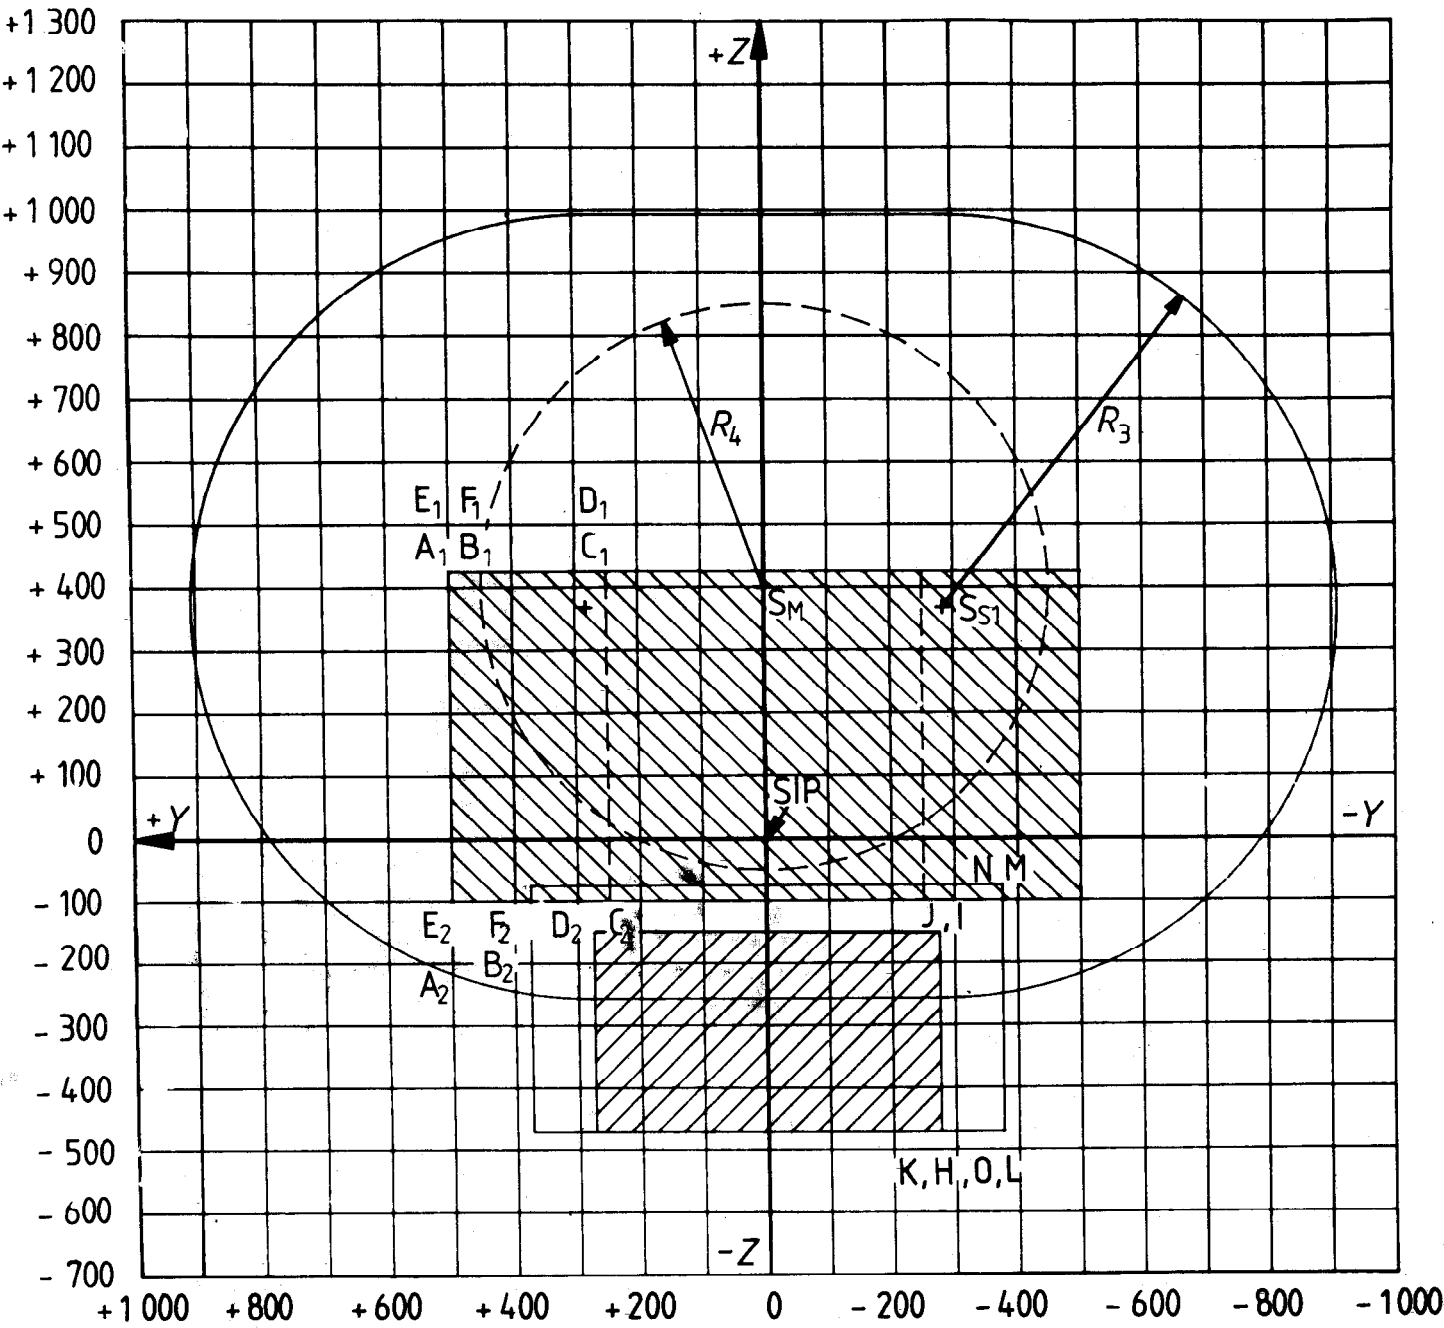


Figure 6 — Coordinates for zones of comfort and reach — Front view

Standard Mark

The use of the Standard Mark is governed by the provisions of the *Bureau of Indian Standards Act, 1986* and the Rules and Regulations made thereunder. The Standard Mark on products covered by an Indian Standard conveys the assurance that they have been produced to comply with the requirements of that standard under a well defined system of inspection, testing and quality control which is devised and supervised by BIS and operated by the producer. Standard marked products are also continuously checked by BIS for conformity to that standard as a further safeguard. Details of conditions under which a licence for the use of the Standard Mark may be granted to manufacturers or producers may be obtained from the Bureau of Indian Standards.

Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act, 1986* to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in the course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Director (Publications), BIS

Revision of Indian Standards

Amendments are issued to standards as the need arises on the basis of comments. Standards are also reviewed periodically; a standard along with amendments is reaffirmed when such review indicates that no changes are needed; if the review indicates that changes are needed, it is taken up for revision. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition by referring to the latest issue of 'BIS Handbook' and 'Standards Monthly Additions'. Comments on this Indian Standard may be sent to BIS giving the following reference:

Doc : No. HMD 07 (0213)

Amendments Issued Since Publication

Amend No.	Date of Issue	Text Affected

BUREAU OF INDIAN STANDARDS

Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 11002
Telephones : 331 01 31, 331 13 75

Telegrams : Manaksanstha
Common to all Offices)

Regional Offices :

Central : Manak Bhavan, 9 Bahadur Shah Zafar Marg
NEW DELHI 110002

Telephone
{ 331 01 31
{ 331 13 75

Eastern : 1/14 C. I. T. Scheme VII M, V. I. P. Road, Maniktola
CALCUTTA 700054

{ 37 84 99, 37 85 61
{ 37 86 26, 37 86 62

Northern : SCO 445-446, Sector 35-C, CHANDIGARH 160036

{ 53 38 43, 53 16 40
{ 53 23 84

Southern : C. I. T. Campus, IV Cross Road, MADRAS 600113

{ 235 02 16, 235 04 42
{ 235 15 19, 235 23 15

Western : Manakalaya, E9 MIDC, Marol, Andheri (East)
BOMBAY 400093

{ 632 92 95, 632 78 58
{ 632 78, 91, 632 78 92

Branch : AHMADABAD. BANGALORE. BHOPAL. BHUBANESHWAR. COIMBATORE.
FARIDABAD. GHAZIABAD, GUWAHATI. HYDERABAD. JAIPUR. KANPUR
LUCKNOW. PATNA. THIRUVANANTHAPURAM.